


Marameter thread anvils

Indicating thread snap gage

FEATURES

- For pitch diameters
- Wear-resistant special steel, hardened
- With cylindrical mounting shank and retainer ring for rotatable mounting in the bore of the dial comparator snap gage
- Adjustment with threaded setting plug 715 E

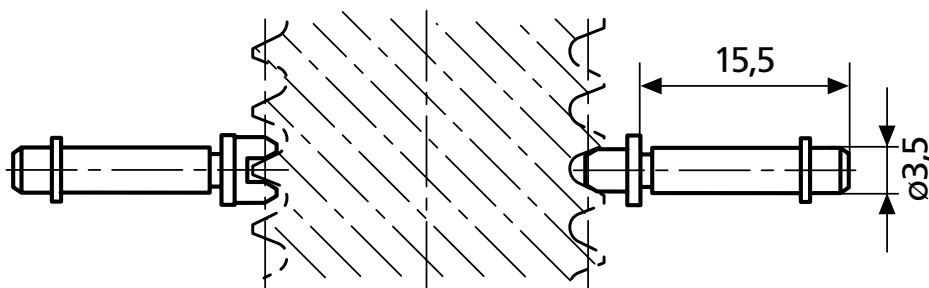

ACCESSORIES

Thread pitch	Blade Order no.	V-anvil Order no.
Pitch diameter, external thread		
Metric 60°		
0.2	4173051	4174007
0.25	4173052	4174008
0.3	4173053	4174009
0.35	4173054	4174010
0.4	4173055	4174011
0.45	4173056	4174012
0.5–0.7	4173000	4174000
0.7–1	4173001	4174001
1.25–2	4173002	4174002
2–3.5	4173003	4174003
3.5–5	4173004	4173704
5–7	4173005	4174005
7–9	4173006	4174006

Thread pitch in TPI	Blade Order no.	V-anvil Order no.
UST 60°		
60–48	4173124	4176113
48–40	4173125	4176114
40–32	4173115	4176115
32–24	4173116	4176116
24–18	4173117	4176117
18–14	4173118	4176118
14–10	4173119	4176119
10–7	4173120	4176120
7–4.5	4173121	4176121
4.5–3	4173122	4176122
Whitworth 55°		
40–32	4173043	4176043
32–24	4173044	4176044
24–18	4173045	4176045
18–14	4173046	4176046
14–10	4173047	4176047
10–7	4173048	4176048
7–4.5	4173049	4176049
4.5–3	4173050	4176050
3–2.5	4179408	4179411