

Digital Micrometer Heads with 10 mm Stem

Series 350

This Micrometer Head has a 25 mm range and a 10 mm stem, and offers the following benefits:

- You can integrate it into machinery and measuring instruments.
- Measurement values are clearly displayed in 0,001mm increments.
- Stem diameter: 10 mm.



350-251-30

Functions	Series 350
ZERO/ABS	●
Auto Power OFF after 20 min. non use	●
Function lock	●
HOLD	●
2 x PRESET	●

Specifications

Display	LCD, character height 7,5 mm
Measuring face	Carbide-tipped
Measuring spindle	With spindle lock, ø 6,35 mm
Scale	Thimble and sleeve satin chrome finish
Power supply	1 battery SR-44
Battery life	Approx. 2,4 years

Optional accessories



No.	Description
05CZA662	Digimatic Cable with Data Button IP Type, 1m, Micrometer Type
05CZA663	Digimatic Cable with Data Button IP Type, 2m, Micrometer Type
06AFM380B	USB Input Tool Direct (Digimatic USB), Digi/Digi2, With Data Button IP Micrometer Type
264-622	U-WAVE fit, IP67 Type, Wireless Transmitter for Micrometer
264-623	U-WAVE fit, Buzzer Type, Wireless Transmitter for Micrometer
02AZF310	Connection Unit, U-WAVE fit, Waterproof Type

Consumable spares

No.	Description
938882	Battery SR44 1.5V

Metric

No.	Range [mm]	Digital step	Maximum Permissible Error J MPE	Spindle end	Spindle pitch	Stem	Stem Ø	Fixture thickness for clamp nut [mm]	Mass [g]
350-251-30	0 - 25	0,001 mm	±2 µm	Flat	0,5 mm	Plain	10 mm		230
350-252-30	0 - 25	0,001 mm	±2 µm	Flat	0,5 mm	w/ clamp nut	10 mm	11,5	230
350-253-30	0 - 25	0,001 mm	±2 µm	Spherical (SR4)	0,5 mm	Plain	10 mm		230
350-254-30	0 - 25	0,001 mm	±2 µm	Spherical (SR4)	0,5 mm	w/ clamp nut	10 mm	11,5	230

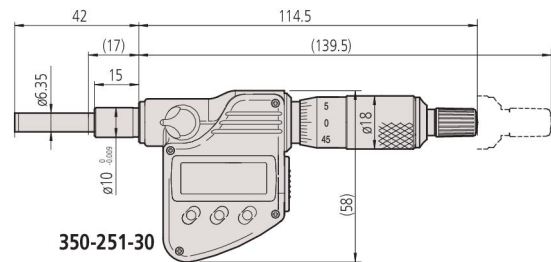

(): with spindle full retracted