

ABSOLUTE Digimatic Calipers for Tolerance Measurement

ABSOLUTE®

Functions	Series 573
ORIGIN (ABS-Zero)	●
ON/OFF	●
ZERO/ABS	●
Low voltage alarm	●
Data output	●

Specifications


Max. response speed	Unlimited
Jaw retraction	2 mm
Delivered	In a case, including 1 battery
Battery life	approx. 18000 hours

Optional accessories

No.	Description
959149	Digimatic Cable, Straight, Data Button,, 1m
959150	Digimatic Cable, Straight, Data Button,, 2m
06AFM380C	USB Input Tool Direct (Digimatic USB), Digi/Digi2, Straight, with Data Button
264-620	U-WAVE fit, IP67 Type, Wireless Transmitter for Caliper
264-621	U-WAVE fit, Buzzer Type, Wireless Transmitter for Caliper
02AZF310	Connection Unit, U-WAVE fit, Waterproof Type
959143	Data Hold Unit

Consumable spares


No.	Description
938882	Battery SR44 1.5V



Series 573

The ABSOLUTE Digimatic snap caliper for tolerance measurement features a spring-loaded mechanism to allow quick and efficient GO/±NO-GO inspection for mass produced parts.

- Large character height (alleviation of fatigue with the high-contrast LCD)
- The ABS (ABSOLUTE) scale requires no origin setting after power-on and also has no limit to response speed.
- Extraordinary battery life

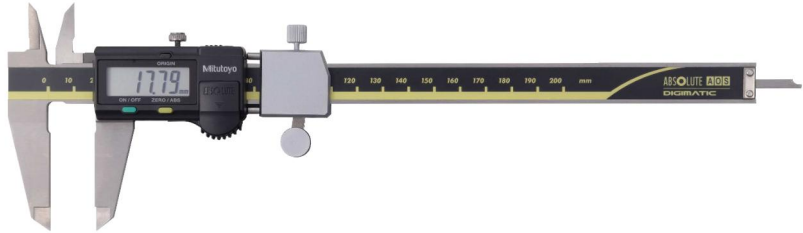

573-182-30

Metric

No.	Range [mm]	Accuracy	Digital step	Mass [g]	L [mm]	a [mm]	b [mm]	c [mm]	d [mm]
573-181-30	0-100	±0,02 mm	0,01 mm	213	233	40	21	16,5	16
573-182-30	0-150	±0,02 mm	0,01 mm	233	290	50	24,5	20	16

