

Offset Calipers

Functions	Series 573
ORIGIN (ABS-Zero)	●
Auto Power OFF after 20 min. non use	●
Low voltage alarm	●
Data output	●

Specifications

Max. response speed	Unlimited
Delivered	In a case, including 1 battery
Battery life	Approx. 5 years under normal use

Optional accessories


No.	Description
05CZA624	Digimatic Cable with Data Button IP Type, 1m, Caliper Type
05CZA625	Digimatic Cable with Data Button IP Type, 2m, Caliper Type
06AFM380A	USB Input Tool Direct (Digimatic USB), Digi/Digi2, With Data Button IP Caliper Type
264-620	U-WAVE fit, IP67 Type, Wireless Transmitter for Caliper
264-621	U-WAVE fit, Buzzer Type, Wireless Transmitter for Caliper
02AZF310	Connection Unit, U-WAVE fit, Waterproof Type

Consumable spares

No.	Description
938882	Battery SR44 1.5V

Specifications

Delivered	In a case
-----------	-----------

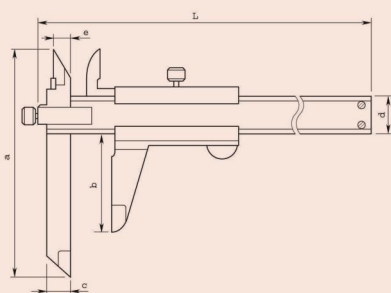

Series 573

These offset calipers enable you to measure stepped workpieces. They offer you the following benefits:

- You can adjust the beam-mounted jaw to facilitate measurement of stepped sections and hard-to-reach workpiece features.




573-602-20

Metric Without thumb roller

No.	Range [mm]	Digital step	Mass [g]	a [mm]	b [mm]	c [mm]	d [mm]
573-611-20	0-150	0,01 mm	168	95	10	40	30
573-612-20	0-200	0,01 mm	198	95	10	50	38,5
573-614-20	0-300	0,01 mm	965	135	15	64	51

Metric With thumb roller


No.	Range [mm]	Digital step	Mass [g]	a [mm]	b [mm]	c [mm]	d [mm]
573-601-20	0-150	0,01 mm	168	95	10	40	30
573-602-20	0-200	0,01 mm	198	95	10	50	38,5
573-604-20	0-300	0,01 mm	970	135	15	64	51



Series 536

This Offset Caliper enables you to measure stepped workpieces and offers you the following benefits:

- The beam-mounted jaw is adjustable to facilitate the measurement of stepped sections and hard-to-reach workpiece features.

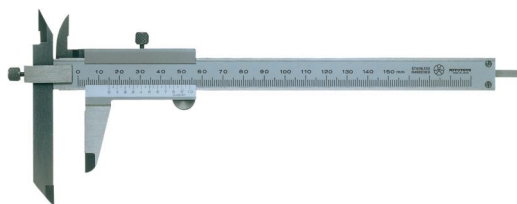

Metric

No.	Range [mm]	Graduation	Mass [g]	L [mm]	a [mm]	b [mm]	c [mm]	d [mm]	e [mm]
536-101	0-150	0,05 mm	150	229	95	40	10	16	7,5
536-102	0-200	0,05 mm	200	286	95	50	10	16	8,5
536-103	0-300	0,05 mm	400	403	135	64	15	20	12