

Digimatic Micrometers Interchangeable Anvil Type

Series 317

This Digimatic Micrometer Interchangeable Anvil Type lets you measure a range of different features.

It offers the following benefits:




- Measures tubing thickness, shoulder edge distance, rivet head height, etc., with interchangeable anvils (flat anvil, rod anvil, V-anvil).



317-251-30

Metric

No.	Range [mm]	Spindle feed error	Flatness	Parallelism	Digital step	Measuring force [N]	Content of Set	Mass [g]
317-251-30	0 - 25	3 µm	0,6 µm (spindle), 2 µm (anvil)	3 µm	0,001 mm	5-10	Anvils 201217, 201216	335
317-252-30	25 - 50	3 µm	0,6 µm (spindle), 2 µm (anvil)	3 µm	0,001 mm	5-10	Anvils 201379, 201216	360

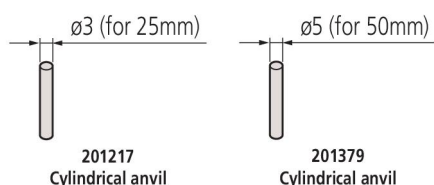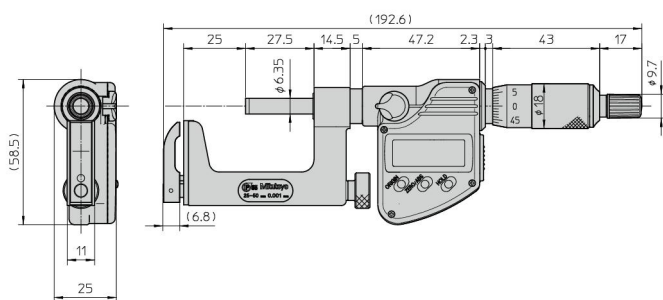

Functions	Series 317
ORIGIN	●
ZERO/ABS	●
Auto Power OFF after 20 min. non use	●
Low voltage alarm	●
Function lock	●
HOLD	●

Specifications

Display	LCD, character height 7,5 mm
Measuring face	Carbide-tipped spindle, hardened anvil
Measuring spindle	With spindle lock, ø 6,35 mm, spindle pitch 0,5 mm
Scale	Thimble and sleeve satin chrome finish
Power supply	1 battery SR-44
Battery life	Approx. 2,4 years
Delivered	Including box, setting standard (from 25 mm upward), key, 1 battery, anvils

Optional accessories

No.	Description
05CZA662	Digimatic Cable with Data Button IP Type, 1m, Micrometer Type
05CZA663	Digimatic Cable with Data Button IP Type, 2m, Micrometer Type
06AFM380B	USB Input Tool Direct (Digimatic USB), Digi/Digi2, With Data Button IP Micrometer Type
264-622	U-WAVE fit, IP67 Type, Wireless Transmitter for Micrometer
264-623	U-WAVE fit, Buzzer Type, Wireless Transmitter for Micrometer
02AZF310	Connection Unit, U-WAVE fit, Waterproof Type
950758	Round Base for Series 117, for 0-25mm
201218	V-Anvil

Consumable spares

No.	Description
938882	Battery SR44 1.5V
201217	Cylindrical Anvil 3mm
201379	Cylindrical Anvil 5mm
201216	Flat Anvil



950758 with micrometer