

2D Image Correlation Encoder MICSYS

Catalog No.E13001



Making small, non-contact, 2D-displacement
measurements at the nanometer level

Mitutoyo

Two-dimensional micro-displacement measurement achieved with high resolution and high accuracy.


FEATURES

- High accuracy non-contact 2D encoder using image correlation.
- Simultaneous X-Y position measurements.
- Nanometer resolution.
- Easy alignment.
- Allows minute strain and deflection measurements.




Measuring principle

When the rough surface of an object is irradiated by a laser beam, the beam is scattered into multiple reflected beams that, due to the coherent nature of laser radiation, interfere with each other to form a particular kind of reflection called a speckle pattern. Now, if the object is moved, the speckle pattern image is also moved in proportion, and this effect can be used to track the 2D displacement of the object at the nanometer resolution level by comparing the speckle images obtained before and after the movement (image correlation).

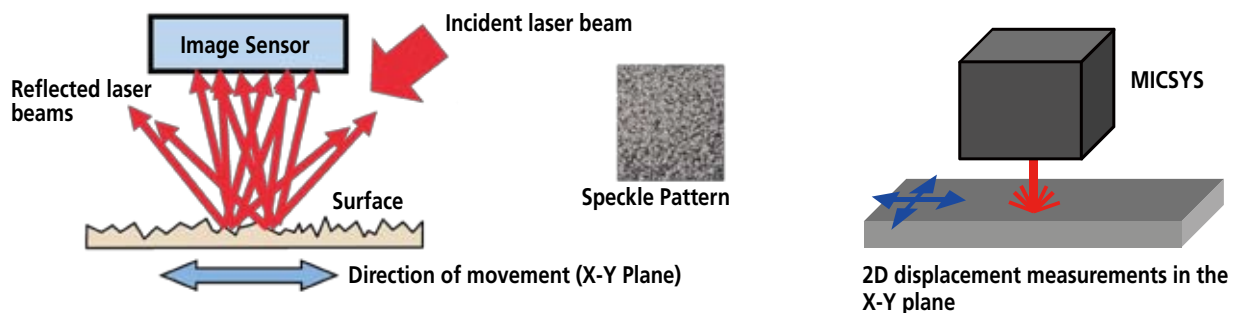

System Configuration

Standard configuration: Detector, I/F unit, Head cable, Sample software for data correlation, Standard target

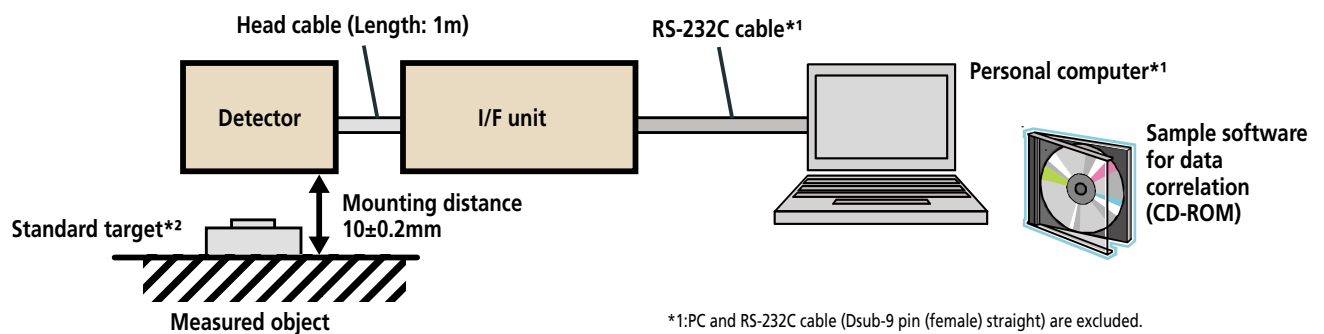

*1: PC and RS-232C cable (Dsub-9 pin (female) straight) are excluded.

*2: For stable measurements, we recommend the installation of a standard target provided.


Specification

Model No.	MICSYS-SA1
Order No.	549-701
Detection method	Laser speckle image correlation
Resolution	1nm
Repeatability (20°C)	5nm (σ)
Accuracy (20°C)	$\pm 100\text{nm}$; Linearity: 80nm
Effective range	$\pm 100\mu\text{m}$ (2D)
Interface	RS-232C
Data update period	20Hz
Laser wavelength	650nm (Visible) Class 2
Operating temperature and humidity range	Detector: 15-25°C, I/F unit: 0-40°C, 20-80%RH (Non-condensing)
Storage temperature and humidity range	-10-50°C / ~85%RH (Non-condensing)
Power supply	AC100-240V 45W 50/60Hz
Standard accessories	Standard target, Sample software for data correlation (on CD-ROM)

* : Measurement is performed within the X-Y plane from the origin point with the standard target.


Measurement accuracy relative to position

* : The following results are typical but are not guaranteed for any particular unit.
 * : Measurement is performed within the X-Y plane from the origin point with the standard target.

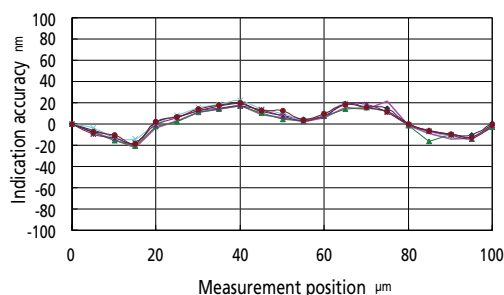

Effect of temperature change on dimensional output


* : The following results are typical but are not guaranteed for any particular unit.
 * : Measurement is performed within the X-Y plane from the origin point with the standard target.

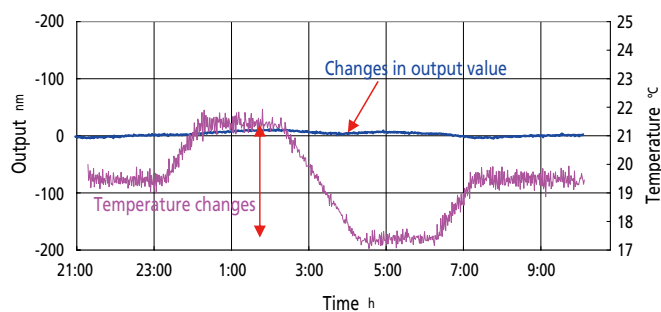

Dimensions Unit : mm


Detector

Mass : 300g

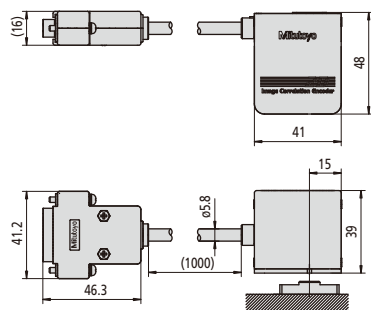


I/F unit

Mass : 1700g

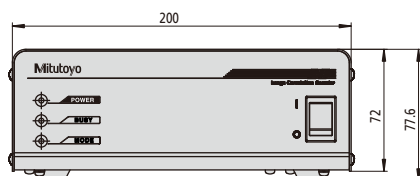


Standard target

Mass : 10g

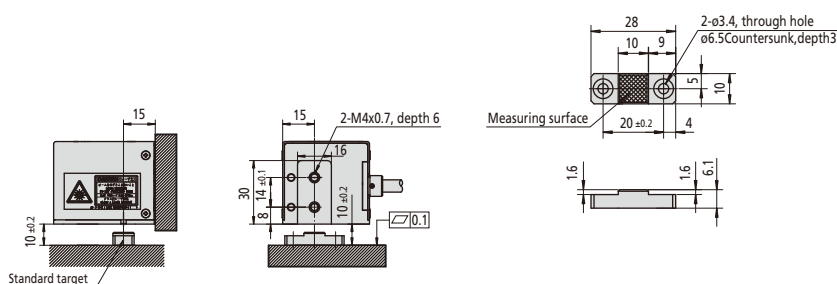


Applications


1. Evaluation stage system for various types of manufacturing and inspection equipment

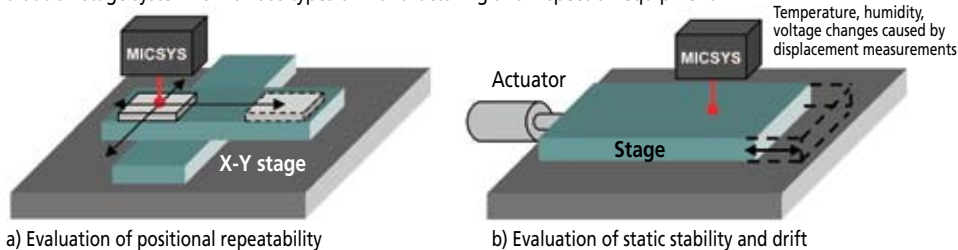

2. High-precision positioning for various types of workpiece (device)

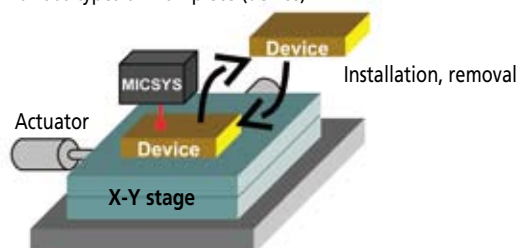

3. Determination of a small displacement

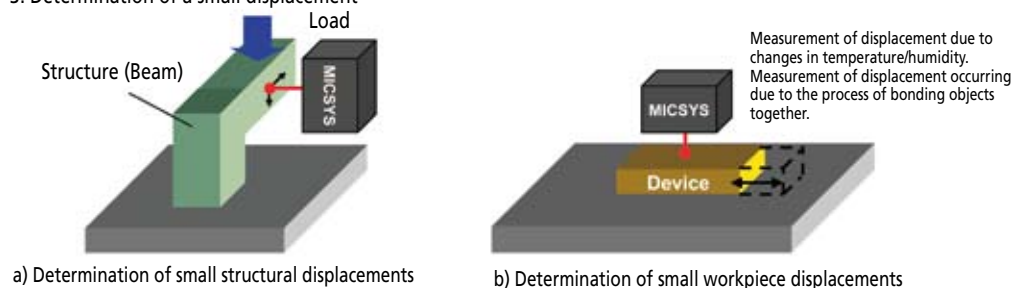

Export permission by the Japanese government may be required for exporting our products according to the Foreign Exchange and Foreign Trade Law. Please consult our sales office near you before you export our products or you offer technical information to a nonresident.

Coordinate Measuring Machines

Vision Measuring Systems

Form Measurement

Optical Measuring

Sensor Systems

Test Equipment and
Seismometers

Digital Scale and DRO Systems

Small Tool Instruments and
Data Management

Mitutoyo Corporation

20-1, Sakado 1-chome,
Takatsu-ku, Kawasaki-shi,
Kanagawa 213-8533, Japan
T +81 (0) 44 813-8230
F +81 (0) 44 813-8231
<http://www.mitutoyo.co.jp>

Note: All information regarding our products, and in particular the illustrations, drawings, dimensional and performance data contained in this pamphlet, as well as other technical data are to be regarded as approximate average values. We therefore reserve the right to make changes to the corresponding designs, dimensions and weights. The stated standards, similar technical regulations, descriptions and illustrations of the products were valid at the time of printing. Only quotations submitted by ourselves may be regarded as definitive.

Our products are classified as regulated items under Japanese Foreign Exchange and Foreign Trade Law. Please consult us in advance if you wish to export our products to any other country. If the purchased product is exported, even though it is not a regulated item (Catch-All controls item), the customer service available for that product may be affected. If you have any questions, please consult your local Mitutoyo sales office.

Mitutoyo