

Roundness/Cylindricity Measurement ROUNDTEST RA-2200 Series

Catalog No.E4385



Roundness/Cylindricity measuring system offering highest precision level in its class, exceptional ease-of-use, and multifunction analysis capability

Mitutoyo

ROUNDTEST RA-2200AS/DS/AH/DH

All models are equipped with a highly accurate turntable that enables simple and accurate centering and leveling of the workpiece, which account for the majority of the essential setup work for measuring roundness/cylindricity.

Wide variety of models available to suit any application

- RA-2200AS/AH models are supplied as standard with an automatic centering and leveling turntable*¹, freeing the operator from the centering and leveling task.
- RA-2200DS/DH models are supplied as standard with a navigation function*¹ that quickly and simply guides the operator through the centering and leveling task, as though the task were being performed by an expert.
- RA-2200AS/DS models have a column drive height of 300 mm, and are available with a column drive height of 500 mm (RA-2200AH/DH) for handling taller workpieces.
- All models can be combined with the basic, side-table system vibration-damping platform or the monitor-arm system vibration-damping platform*³.


Space-saving design

Integrating the system vibration-damping platform has reduced the installation space by approximately 20-40% compared to Mitutoyo's earlier installation platforms. Additionally, a design with increased layout freedom greatly improves the measurement room utilization rate and measurement efficiency.

Sliding detector-unit holder provided as a standard feature

The detector-unit holder is equipped with a sliding mechanism, enabling one-touch measurement of a workpiece with a deep hole having a thick wall, which has been difficult with the conventional standard arm.

Sliding distance: 112 mm

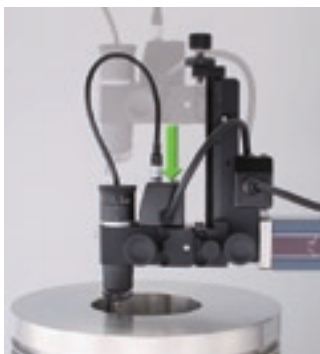

The detector-unit holder can be stopped at a position sufficiently higher than the workpiece along the Z-axis, and then lowered and positioned to make measurements. Furthermore, internal/external diameters can be easily measured with the continuous internal/external diameter measurement function*².

The photo shows RA-2200AS + vibration isolator with side table.

Safety mechanism provided as a standard feature



A safety mechanism is incorporated into the detector unit area. A collision-sensing function has been added to the detector unit (when it is in the vertical orientation) to prevent collision in the Z-axis direction. Additionally, an accidental collision prevention function, which stops the system when the detector unit displacement exceeds its range, has been added. When an accidental touch is detected, the dedicated analysis software (ROUNDPAK) senses the error and automatically stops the system.

*¹: See page 3 for details about the turntable.

*²: See page 3 for details about the continuous ID and OD measuring function.

*³: Printer table is a special Accessory.

Equipped with a highly accurate turntable that enables simple and accurate centering and leveling of the workpiece

The table provides high rotational accuracy (radial $0.02+3.5H/10000 \mu\text{m}$; axial $0.02+3.5X/10000 \mu\text{m}$), enabling the system to measure flatness and other characteristics, in addition to roundness/cylindricity, at a level that suits any application.

For centering and leveling support, you can select either the A.A.T. (Automatic Adjustment Table) or D.A.T. (Digimatic Adjustment Table).

A.A.T. (Automatic Adjustment Table)

Incorporating an Automatic Adjustment Table (A.A.T.), the top-of-the-line RA-2200AS/AH models relieve the operator of workpiece centering and leveling.

Centering range: $\pm 3 \text{ mm}$
Leveling range: $\pm 1^\circ$

Preliminary measurement
Preliminary measurement of two cross-sections 'A' and 'B'.

Centering/leveling complete
Preliminary measurement is followed by automatic centering and leveling.

D.A.T. (Digimatic Adjustment Table)

A guidance system (D.A.T.) is incorporated into the turntables on the RA-2200DS/DH models to help the operator perform manual centering and leveling smoothly and simply. Patent registered in Japan, USA Patent pending in Germany

Centering range: $\pm 5 \text{ mm}$
Leveling range of inclination: $\pm 1^\circ$

Preliminary measurement
Preliminary measurement of two cross-sections 'A' and 'B'.

Display of misalignments

Simple adjustment
Feed the digital micrometer head of the turntable by the deviation displayed.

Centering/leveling complete

High accuracy even at high positioning speeds

Continual development has resulted in the highest drive speed within the class.


- Vertical direction (Z-axis column): Max. 50 mm/s
- Radial direction: Max. 30 mm/s

Continuous OD/ID measurement function

Patent registered in Japan, USA, Germany, UK, France

Continuous internal/external diameter measurement is possible without changing the detector position.

- 1), 2) : External diameter measurement
- 3) : Internal diameter measurement
- : Displacement
- 3) = inner diameter: Up to $\phi 50 \text{ mm}$




Highly accurate repeat measurements

Mitutoyo's linear scales are incorporated into the X-axis positioning sensor, directly sensing the displacement of the drive unit to achieve highly accurate positioning, which is essential for repeat measurements.

Partial circle measurement function

Even if a workpiece cannot be measured by physically rotating it by a full turn due to some obstruction (projection), segments of the circumference can be measured.

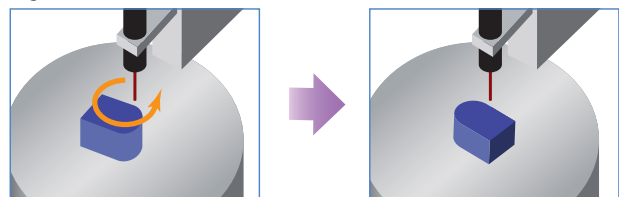

Spiral Measurement/Analysis

The spiral-mode measurement function combines table rotation and rectilinear action allowing cylindricity, coaxiality, and other data to be loaded as a continuous data set.



Measurement through X-axis tracking

Measurement while tracing is possible through a built-in linear scale in the X-axis. This type of measurement is useful when displacement due to form variation exceeds the measuring range of the sensor, and X-axis motion is necessary to maintain contact with the workpiece surface.



Specifications

•RA-2200AS/DS/AH/DH

Model No.		RA-2200AS	RA-2200DS	RA-2200AH	RA-2200DH
Turntable unit	Rotational accuracy	(0.02+3.5H/10000)μm		H: probing height (mm)	
	Radial direction				
	Axial direction	(0.02+3.5X/10000)μm			
	Rotating speed	2, 4, 6, 10 rpm			
	Table effective diameter	ø235 mm	ø200 mm	ø235 mm	ø200 mm
	Centering/leveling adjustment	A.A.T	D.A.T	A.A.T	D.A.T
	Centering adjustment range	±3 mm	±5 mm	±3 mm	±5 mm
	Leveling adjustment range	±1°			
	Max. loading weight	30 kg			
	Max. probing diameter	ø300 mm			
Max. loading diameter	ø580 mm				
Vertical drive unit (Z-axis)	Straightness accuracy	0.10 μm/100 mm (λc2.5)	0.15 μm/300 mm (λc2.5)	0.10 μm/100 mm (λc2.5)	0.25 μm/500 mm (λc2.5)
	Parallelism to rotation center	0.7 μm/300 mm (Referential generatrix line)			
	Traverse speed	Max. 50 mm/s (Measurement : 0.5/1.0/2.0/5.0 mm/s)			
	Max. probing height	OD 300 mm	ID 300 mm	500 mm	
Radial drive unit (X-axis)	Max. probing depth	85 mm for ø32 mm or more (with standard stylus)			
	Straightness accuracy	0.7 μm/150 mm (λc2.5)			
	Horizontal to rotation center	1.0 μm/150 mm (Referential generatrix line)			
	Travel amount	175 mm (from rotation center -25 mm~+150 mm)			
Detector	Travel speed	Max. 30 mm/s (measurement: 0.5/1.0/2.0/5.0 mm/s)			
	Measuring force	10 ~ 50 mN (switching 5 levels) (ID/OD measurement style with standard stylus)			
	stylus design, material	ø1.6 mm tungsten carbide ball			
	Measuring range	Standard	±400 μm / ±40 μm / ±4 μm		
Other	Follow	±5 mm			
	Other	2 direction one-touch switching type, Stylus angle scale markings (±45°), Contention detection function for Z-axis direction, Sliding detector holder (3 position)			
	Power supply	100V ~ 240V			
	Air pressure	0.39 MPa			
Weight (measurement main unit)	Air consumption	30 L/min (standard state)			
	Weight (measurement main unit)	180 kg		200 kg	

•Styli for RA-2200AS/DS/AH/DH (Option)

Type	Standard (Standard accessory)	Notch	Deep groove	Corner	Cutter mark
Order No.	12AAL021	12AAL022	12AAL023	12AAL024	12AAL025
Stylus tip	ø1.6mm tungsten carbide	ø3mm tungsten carbide	SR0.25mm sapphire	SR0.25mm sapphire	tungsten carbide
Dimensions (mm)					
Type	Small hole (ø0.8)	Small hole (ø1.0)	Small hole (ø1.6)	Extra small hole (Depth 3mm)	ø1.6 mm ball
Order No.	12AAL026	12AAL027	12AAL028	12AAL029	12AAL030
Stylus tip	ø0.8mm tungsten carbide	ø1mm tungsten carbide	ø1.6mm tungsten carbide	ø0.5mm tungsten carbide	ø1.6mm tungsten carbide
Dimensions (mm)					
Type	Disk	Crank (ø0.5)	Crank (ø1.0)	Flat surface	2X-long type*1
Order No.	12AAL031	12AAL032	12AAL033	12AAL034	12AAL035
Stylus tip	ø12mm tungsten carbide	ø0.5mm tungsten carbide (Depth 2.5mm)	ø1mm tungsten carbide (Depth 5.5mm)	tungsten carbide	ø1.6mm tungsten carbide
Dimensions (mm)					
Type	2X-long type notch*1	2X-long type deep groove*1	2X-long type corner*1	2X-long type cutter mark*1	2X-long type Small hole*1
Order No.	12AAL036	12AAL037	12AAL038	12AAL039	12AAL040
Stylus tip	ø3mm tungsten carbide	SR0.25mm sapphire	SR0.25mm sapphire	tungsten carbide	ø1mm tungsten carbide
Dimensions (mm)					
Type	3X-long type*1	3X-long type deep groove*1	Stylus shank	Stylus shank(standard groove)	Stylus shank(2X-long groove)*1
Order No.	12AAL041	12AAL042	12AAL043	12AAL044	12AAL045
Stylus tip	ø1.6mm tungsten carbide	SR0.25mm sapphire	For mounting CMM stylus (mounting thread M2)	For mounting CMM stylus (mounting thread M2)	For mounting CMM stylus (mounting thread M2)
Dimensions (mm)					

*1: Measuring is only possible in the vertical direction.

*2: Customized special interchangeable styli are available on request. Please contact any Mitutoyo office for more information.

ROUNDTEST EXTREME RA-2200CNC


Detector unit orientation programmable for CNC measurement

This function controls the orientation of the arm holding the detector unit (between vertical and horizontal) and the detector unit rotation mechanism (between 0 and 270 degrees in 1-degree increments), making it possible to continuously and automatically measure internal/external diameters as well as top/bottom surfaces. Additionally, a full-featured offline teaching function simplifies the creation of part programs.



Simple and accurate centering and leveling of the workpiece

The system comes standard with the A.A.T. (Automatic Adjustment Table) positioning and leveling function, freeing the operator from the task of centering and leveling the workpiece.

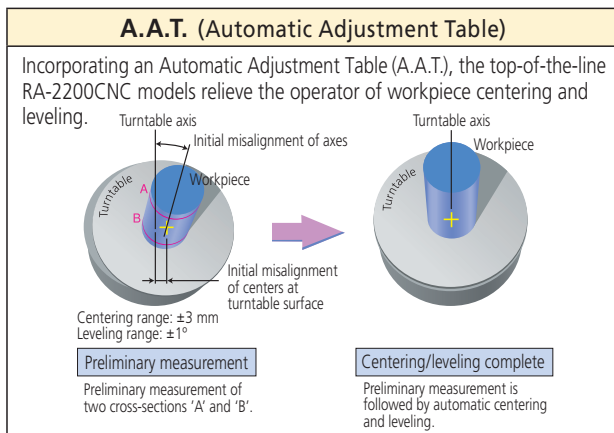

Highly accurate turntable

The table provides high rotational accuracy (radial $0.02+3.5H/10000 \mu\text{m}$; axial $0.02+3.5X/10000 \mu\text{m}$), enabling the system to measure flatness and other characteristics, in addition to roundness/cylindricity, at a level that suits any application.

Space-saving design


Integrating the system vibration-damping platform has significantly reduced the installation space requirements. Additionally, any layout can be achieved by combining the system with a PC table.

Highly accurate positioning sensor

A Mitutoyo linear scale is incorporated into the X-axis positioning sensor, directly sensing the displacement of the drive unit to achieve highly accurate positioning, which is essential for repeat measurements. Furthermore, continual development has resulted in the highest drive speed within the class while achieving high accuracy even at high positioning speeds.

Roughness detector unit support

When an optional roughness detector unit is incorporated into the system it can measure workpiece surface roughness in the circumferential direction around the θ -axis, as well as roughness in the direct-drive directions along the X- and Z-axes with the table stopped.

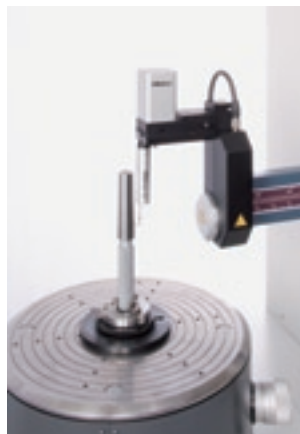

The photo shows RA-2200CNC+ vibration isolator with side table.

Specifications

•RA-2200CNC

Model No.			RA-2200 CNC	
Z-axis			Standard column	High column
Turntable unit	Rotational accuracy	Radial direction	(0.02+3.5H/10000) μm	
		Axial direction	(0.02+3.5X/10000) μm	
	Rotating speed		2, 4, 6, 10 rpm	
	Table effective diameter		φ235 mm	
	Centering/leveling adjustment		A.A.T	
	Centering adjustment range		±3 mm	
	Leveling adjustment range		±1°	
	Max. loading weight		30 kg	
	Max. probing diameter		φ256 mm	
Max. loading diameter		φ580 mm		
Vertical drive unit (Z-axis)	Straightness accuracy		0.10 μm/100 mm (λc2.5) 0.15 μm/300 mm (λc2.5)	0.10 μm/100 mm (λc2.5) 0.25 μm/500 mm (λc2.5)
	Parallelism to rotation center		0.7 μm/300 mm (Referential generatrix line) 1.2 μm/500 mm (Referential generatrix line)	
	Traverse speed		Max. 50 mm/s (Measurement : 0.5/1.0/2.0/5.0 mm/s)	
	Max. probing height	OD	300 mm	500 mm
		ID	300 mm	500 mm
Max. probing depth		26 mm for φ12.7 mm or more, 104 mm for φ32 mm or more (with standard stylus)		
Radial drive unit (X-axis)	straightness accuracy		0.7 μm/150 mm (λc2.5)	
	Horizontal to rotation center		1.0 μm/150 mm (Referential generatrix line)	
	Travel amount		175 mm (from rotation center -25 mm~+150 mm)	
	Travel speed		Max. 30 mm/s (measurement: 0.5/1.0/2.0/5.0 mm/s)	
Detector	Measuring force		40 mN	
	stylus design, material		φ1.6 mm tungsten carbide	
	Measuring range	Standard	±400 μm	
		Follow	±5 mm	
	Other		Rotating mechanism (within the range 0° to 270°, in increments of 1°)	
Other	Power supply		100 V ~ 240 V	
	Air pressure		0.39 MPa	
	Air consumption		30 L/min (standard state)	
	Weight (measurement main unit)		180 kg	200 kg

•Stylus for RA-2200CNC (Option)

Type	Deep groove	Flat surface	Standard	Notch	Deep hole A
Order No.	12AAE310	12AAE302	12AAF150	12AAE309	12AAE306
Stylus tip	φ1.6mm tungsten carbide	φ1.6mm tungsten carbide	φ1.6mm tungsten carbide	φ3mm tungsten carbide	φ1.6mm tungsten carbide
Dimensions (mm)					
Type	φ1.6 mm ball	φ0.8 mm ball	φ0.5 mm ball	Deep groove	Deep hole B
Order No.	12AAE303	12AAE304	12AAE305	12AAE308	12AAE307
Stylus tip	φ1.6mm tungsten carbide	φ0.8mm tungsten carbide	φ0.5mm tungsten carbide	φ1.6mm tungsten carbide	φ1.6mm tungsten carbide
Dimensions (mm)					

•Options common to the RA-2200AS/DS/AH/DH, RA-2200CNC



•Centering chuck (key operated)

211-014

Suitable for holding longer parts and those requiring a relatively powerful clamp.

- Holding capacity:
Internal jaws: OD = φ2 - φ35mm,
ID = φ25 - φ68mm
External jaws: OD = φ35 - φ78mm
- External dimensions: φ157 x 70.6mm
- Mass: 3.8kg



•Centering chuck (ring operated)

211-032

Suitable for holding small parts with easy-to-operate knurled-ring clamping.

- Holding capacity:
Internal jaws: OD = φ1 - φ36mm,
ID = φ16 - φ69mm
External jaws: OD = φ25 - φ79mm
- External dimensions: φ118 x 41mm
- Mass: 1.2kg




•Micro-chuck

211-031

Used for clamping a workpiece (less than φ1 mm dia.) that the centering chuck cannot handle.

- Holding capacity: φ0.1 - φ1.5mm
- External dimensions: φ118 x 48.5mm
- Mass: 0.6kg



•Magnification calibration gage

211-045

Used for normalizing detector magnification by calibrating detector travel against displacement of a micrometer spindle.

- Maximum calibration range: 400 μm
- Graduation: 0.2 μm
- External dimensions: 235 (max) x 185 x 70mm
- Mass: 4kg

•Cylindrical square 350850

- Straightness: 0.5 μm
- Cylindricity: 2 μm
- External dimensions: φ70 x 250mm
- Mass: 7.5kg

Mitutoyo


Roundness/Cylindricity measurement/Analysis software **ROUNDPAK**

ROUNDPAK provides simple manipulation using a mouse and icons


Simple operations even with a full set of parameters and analysis functions

A wide variety of parameters including those for roundness/cylindricity, as well as flatness and parallelism, are provided as standard features. You can visually select these parameters using icons.


ROUNDPAK also comes with specialized functions, such as the design value best-fit analysis function, the harmonic analysis function, and a function for recording the peak or trough points on a circumference. Data that has already been collected can be easily used for re-calculation, or deleted.



Recalculation





Data deletion

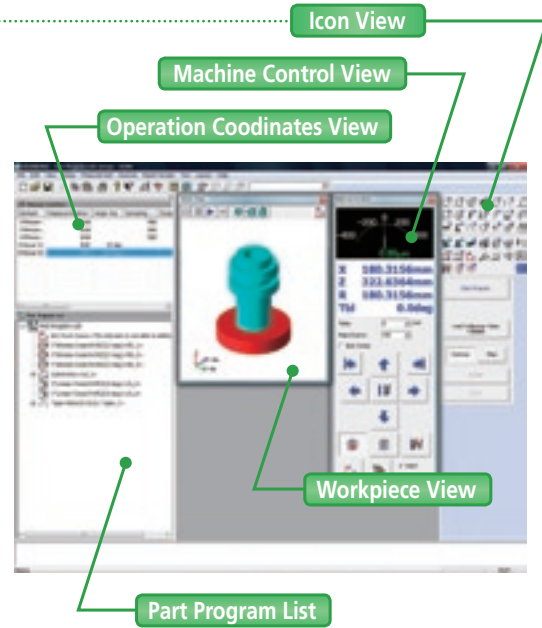


Freedom in laying out the graphics and data obtained from measurements

The customer can create reports in custom formats by specifying how the analysis results will be displayed, as well as the sizes and positions of graphics. The analysis result window can be directly utilized as a layout window. Since the measurement procedure, including the layout information, is saved, the entire process, from measurement start, calculation, result saving, and finally to printing, can be automatically executed.

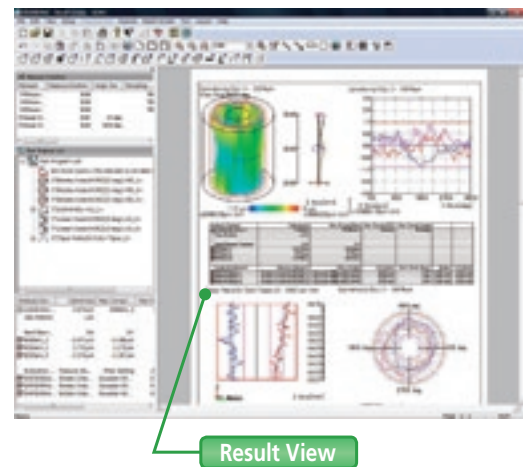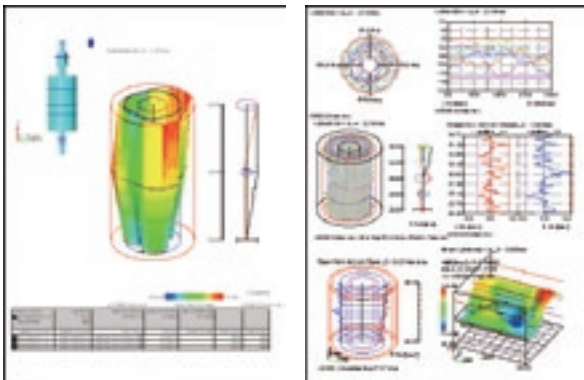

A wide variety of graphics functions

Analysis results such as cylindricity and coaxiality can be visually expressed in 3D graphics.

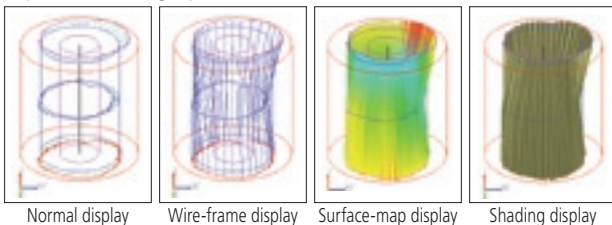

Normal display


Wire-frame display

Surface-map display

Shading display

Off-line measurement procedure programming function


Patent registered in Japan, USA
Patent pending in Europe



An offline teaching function is provided to create a part program (measurement procedure) without an actual measurement target, enabling the user to virtually execute the measurement operation in a 3D simulation window. You can also display warnings* about the risk of collision on the simulation window.

*This function is for RA-2200CNC only.

Dimensions

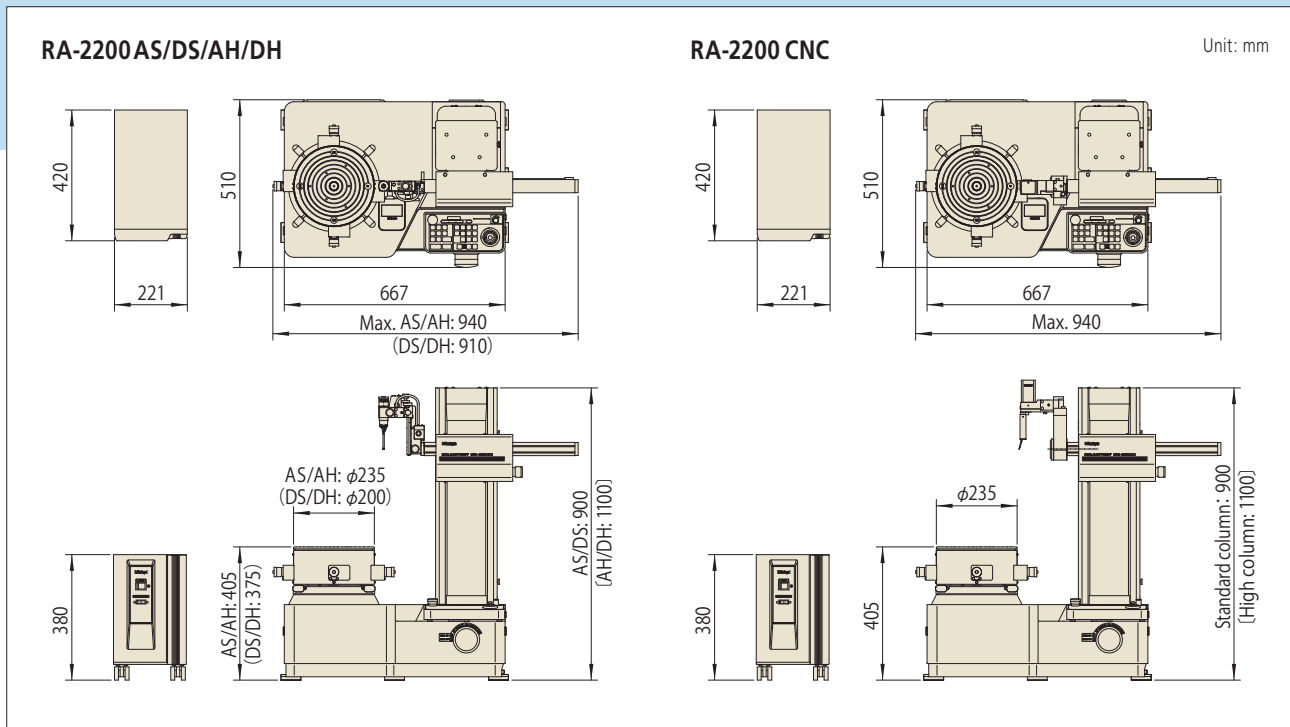

Export permission by the Japanese government may be required for exporting our products according to the Foreign Exchange and Foreign Trade Law. Please consult our sales office near you before you export our products or you offer technical information to a nonresident.

- Coordinate Measuring Machines
- Vision Measuring Systems
- Form Measurement
- Optical Measuring
- Sensor Systems
- Test Equipment and Seismometers
- Digital Scale and DRO Systems
- Small Tool Instruments and Data Management

Mitutoyo Corporation
 20-1, Sakado 1-chome,
 Takatsu-ku, Kawasaki-shi,
 Kanagawa 213-8533, Japan
 T +81 (0) 44 813-8230
 F +81 (0) 44 813-8231
<http://www.mitutoyo.co.jp>

Note: All information regarding our products, and in particular the illustrations, drawings, dimensional and performance data contained in this pamphlet, as well as other technical data are to be regarded as approximate average values. We therefore reserve the right to make changes to the corresponding designs, dimensions and weights. The stated standards, similar technical regulations, descriptions and illustrations of the products were valid at the time of printing. Only quotations submitted by ourselves may be regarded as definitive.
 Our products are classified as regulated items under Japanese Foreign Exchange and Foreign Trade Law. Please consult us in advance if you wish to export our products to any other country. If the purchased product is exported, even though it is not a regulated item (Catch-All controls item), the customer service available for that product may be affected. If you have any questions, please consult your local Mitutoyo sales office.

Mitutoyo