


Tubular Inside Micrometers with Extensions

Series 139

This is an extension pipe type inside micrometer that offers you the following benefits:

- Interchangeable extensions in a hollow pipe design.

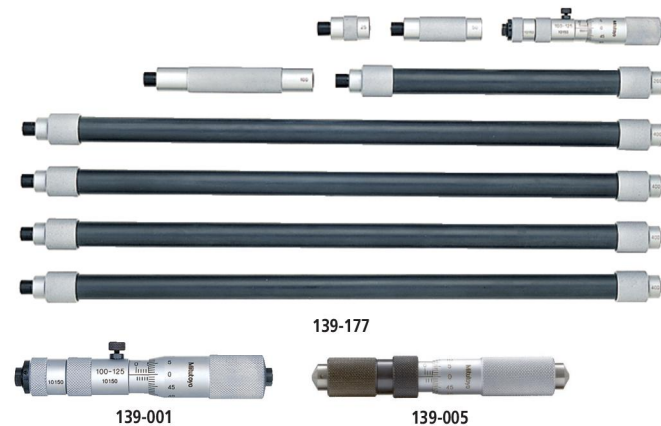

Specifications

Scale	Thimble and sleeve satin chrome finish, ø18 mm ø13 mm (139-203, 139-204)
Measuring spindle	Spindle pitch 0,5 mm
Measuring face	Carbide
Extension	ø17 mm ø10 mm (139-203, 139-204)
Delivered	Including box, key, extensions, micrometer head
Accuracy	$\pm(3+n+L/50) \mu\text{m}$ $\pm(6+L/50) \mu\text{m}$ (139-203, 139-204) n = number of extensions, L = Maximum measuring length (mm)

Standard accessories

No.	Description
139-001	Tubular Inside Micrometer, 100-125mm, for 139-173 to 139-177
139-003	Tubular Inside Micrometer 100-110mm, for 139-203
139-005	Tubular Inside Micrometer 100-125mm, for 139-204

Consumable spares

No.	Description
981003	Extension Rod for Series 139, 339, 25mm
981005	Extension Rod for Series 139, 339, 50mm
981007	Extension Rod for Series 139, 339, 100mm
981009	Extension Rod for Series 139, 339, 200mm
981011	Extension Rod for Series 139, 339, 400mm
981981	Extension Rod 10mm, for 139-203
981982	Extension Rod 20mm, for 139-203
981983	Extension Rod 30mm, for 139-203
981984	Extension Rod 60mm, for 139-203
981985	Extension Rod 90mm, for 139-203
981986	Extension Rod 110mm, for 139-203
981987	Extension Rod 120mm, for 139-203
981988	Extension Rod 130mm, for 139-203
981991	Extension Rod 25mm, for 139-204
981993	Extension Rod 75mm, for 139-204
981994	Extension Rod 150mm, for 139-204
981995	Extension Rod 225mm, for 139-204
981996	Extension Rod 300mm, for 139-204
981997	Extension Rod 350mm, for 139-204
981998	Extension Rod 400mm, for 139-204
981999	Extension Rod 425mm, for 139-204
982000	Extension Rod 450mm, for 139-204

Metric

No.	Range [mm]	Measuring span	Graduation	Extension rods	Mass [g]
139-173	100 - 500	25 mm	0,01 mm	4 (25, 50, 100, 200 mm)	490
139-174	100 - 900	25 mm	0,01 mm	5 (25, 50, 100, 200, 400 mm)	790
139-175	100 - 1300	25 mm	0,01 mm	6 (25, 50, 100, 200, 400 mm (2 pcs.))	1090
139-176	100 - 1700	25 mm	0,01 mm	7 (25, 50, 100, 200, 400 mm (3 pcs.))	1390
139-177	100 - 2100	25 mm	0,01 mm	8 (25, 50, 100, 200, 400 mm (4 pcs.))	1690
139-203	40 - 300	10 mm	0,01 mm	8 (10, 20, 30, 60, 90, 110, 120, 130 mm)	240
139-204	100 - 1000	25 mm	0,01 mm	10 (25, 50, 75, 150, 225, 300, 350, 400, 425, 450 mm)	770

